

NATURAL GAS FIRED EM I6NG

SPECIFICATION DATASHEET



Energy efficiency:	A++
Operational mode:	Mains parallel operation
Fuel:	Natural gas or LPG & H2*
Electrical output (P _{el}):	16 kW ²⁾ min 8 kW
Thermal output (P _{th}):	35.6 kW ²⁾ min 24.7 kW
Fuel consumption:	51.8 kW ¹⁾ (nett) 57.5 kW
CHP coefficient:	(gross) 0.43
Efficiency:	EN 50465
Total efficiency:	104.5% (nett) 94.1% (gross)
Electric efficiency:	31% (nett) 28.1% (gross)
Thermal efficiency:	73.5% (nett) 66.0% (gross)
Gas-connection pressure:	20-50 mbar
Gas-flow pressure:	≤16 mbar
Flow rate with natural gas:	5.0 Nm ³ /h
Flow temperature:	max. 90 °C
Return temperature:	max. 70 °C
Max. system pressure:	6 bar (heating side)
Combustion & cooling air requirement:	min. 58 m ³ /h (65 kg/h)
Ambient temperature:	5°C to max. 35°C
Exhaust gas emissions:	at 0 Vol% remaining oxygen
CO (carbon monoxide):	< 37.0 mg/kWh
NO _x (nitrogen oxide):	< 26.9 mg/kWh
Exhaust gas temperature:	~ 50 °C ²⁾
Exhaust gas volume flow:	~ 63 m ³ /h
Exhaust gas mass flow dry:	~ 70 kg/h
Exhaust gas back pressure after CS ⁴⁾ :	max. 5 mbar
Sound pressure level CHP:	~ 46 dB(A) (1 m distance)


CHP: Dimensions, weights and connections

L x W x H CHP:	1.27 x 0.82 x 0.98 m
Weight CHP: incl. oil and water	740 kg
φ x H CS ⁴⁾ :	0.30 x 1.52 m (w/o flanges)
Weight CS ⁴⁾ :	30 kg
Colour CHP:	Pantone 5517C
Heating connections (VL):	R 3/4" Flow (warm) R 3/4" Return (cold)
Exhaust gas connection CS ⁴⁾ :	DN100
Gas connection:	R 3/4" NG


Motor

Type:	K18
Operation:	Straight line (Otto)
Cylinder:	4-stroke
Displacement:	3
Nominal engine speed:	1.8 litres
	1500 1/min


Output curve [kW_{th} to kW_{el}]
Continuous modulation range

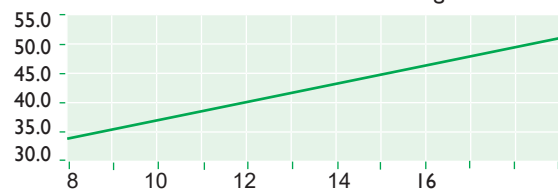

Consumption curve [NM³/h to kW_{el}]

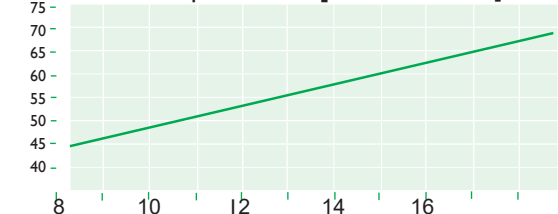

Efficiency curve [% to kW_{el}]

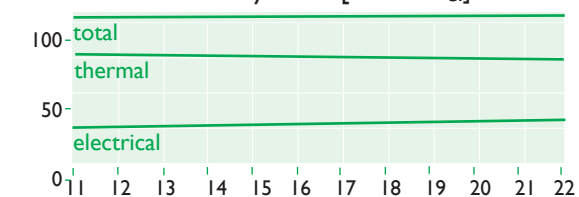

Sound pressure level curve [dB(A) to Hz]⁵⁾



¹⁾ According to DIN ISO 3046-1, tolerance 5%

²⁾ Return temperature 60° C

³⁾ According to EU RL 2004/8/EG with 100% internal use

⁴⁾ Combination silencer

⁵⁾ Test stand measuring without liability

⁶⁾ According to EnEVAndV 2009



PRIME MOVER UNIT

ASYNCHRONOUS GENERATOR EMOD WKASYG

Cooling:	water cooled
Power:	16 kW
Voltage:	400 V
Nominal current:	30 A
Frequency:	50 Hz
Operating mode:	S1

ELECTRICAL DATA ENERGIMIZER 16 NG

Max. effective power PA_{max} :	16 kW
Max apparent power SA_{max} :	16.6 kVA
$\cos \varphi$:	0.97
Nominal voltage U_N :	400 V
Rated current I_r :	25 A
Grid input:	three phase current
Isolated operation intended?:	No
Motor-driven start intended:	No
Starting current I_A :	-
Short circuit current $I''K$:	0.17 kA
Short circuit stability of the complete system I_K :	10 kA
Reactive power compensation:	Existing
Number of compensation steps:	1
Reactive power per step:	7.3 kVArw
Detuning factor respectively resonance frequency:	0
Own requirement:	0.045 kVA


SETTING GRID PROTECTION (VDE-AR-N 41050)

Voltage drop protection $U <$	0.8 U_N (100 ms)
Voltage increase protection $U >$	1.1 U_N (100 ms)
Voltage increase protection $U >>$	1.15 U_N (100 ms)
Frequency drop protection $f <$	47.5 Hz (100 ms)
Frequency increase protection $f >$	51.5 Hz (100 ms)

BRI8 CABINET: DIMS AND WEIGHT

(Wall mounted, connections at the bottom, standard cable set 6 m)	
W x D x H:	0.40 x 0.19 x 0.52 m
Weight:	21 kg
Colour:	Pantone 5517C


Standard reference conditions according to DIN ISO 3046-1: The technical data are based on natural gas H with a heating value of 10.0 kWh/Nm³ (total air pressure 100 kPa, air temperature 25°C, relative humidity 30%, 100m above sea level). Power adjustment at ambient conditions according to DIN ISO 3046-1 respectively DIN 6271-3. The tolerance of the specific fuel consumption is +5% at nominal power and the tolerance of the usable thermal output is 7% at nominal power. We reserve the right to change data and characteristics without prior notice in accordance with our business policy and the ongoing development process.



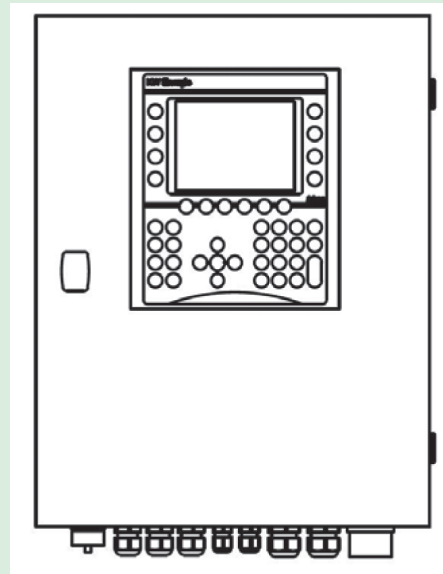


ENERGIMIZER 16 CONTROL PANEL

Programmable BR18 control system to control, adjust, calculate, measure and display result. The control system is equipped with a full graphics touch display and all function buttons required to operate the combined heat and power plant. The 5.7" LCD display shows information about the system and its current status.

The BR18 can optionally be expanded by a heating control system, requirement peak load boiler (up to 2 boilers), data transfer via LAN and Internet with an error notification via email (only with DSL) and an interface connection to external systems (Ethernet UDP, Mod-Bus RTU, RK 512, 3964R).

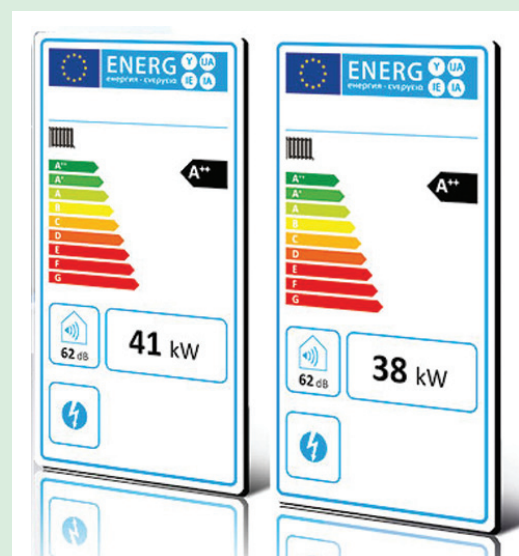

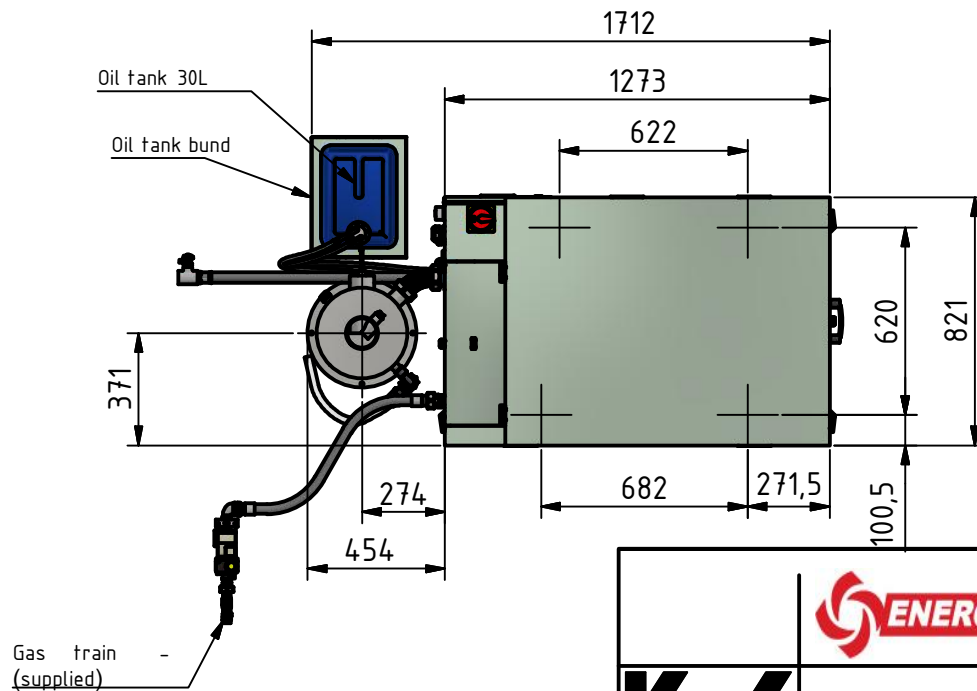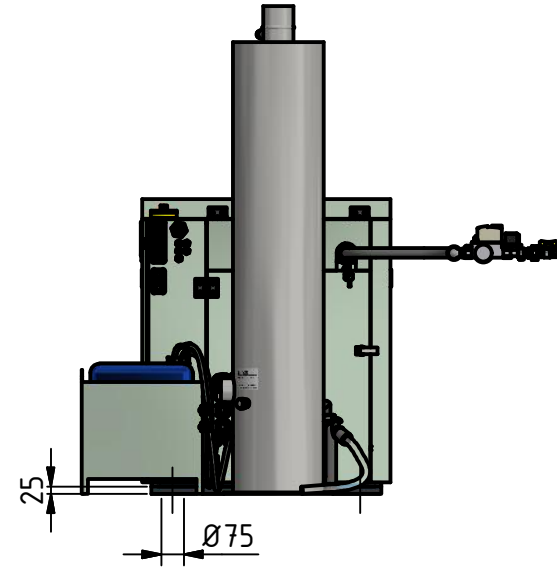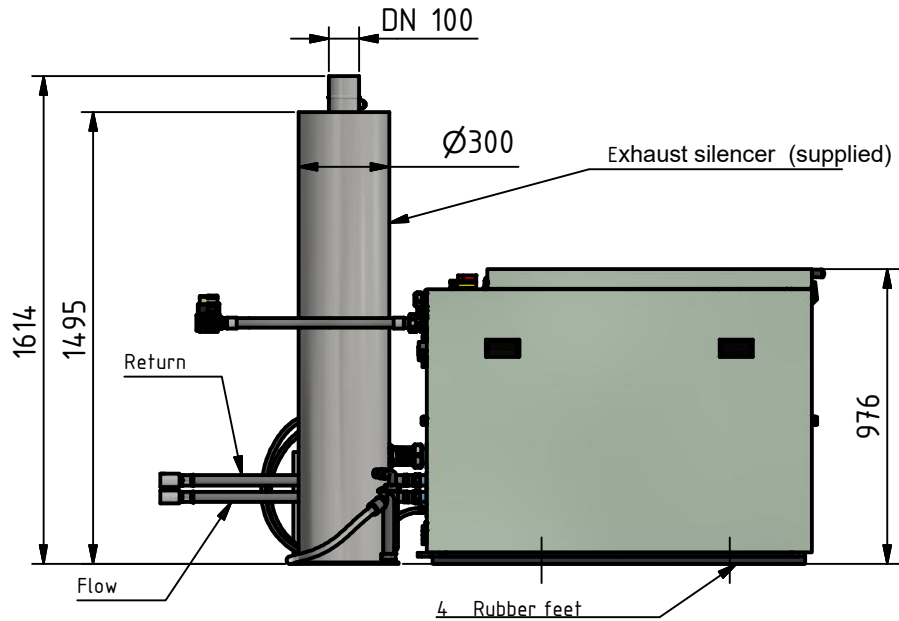



Notes for Installation:

It is absolutely necessary to have a minimum maintenance & service area of at least **600mm** required for access around BOTH sides and the FRONT of the CHP canopy with at least 2000mm above the unit.

With non compliance this may negate the warranty and repair works may be prohibited causing higher costs

 KW. ENERGIE	 CHP Dimensions	Product Number.		Allgemeintoleranz	
		EM16NG CHP		DIN ISO 2768-mK DIN ISO 1302 DIN ISO 13715	
		Date	Name	1 : 25	Revision
		13.03.2019	A. Dünhuber	A4	1
CAD-Drawing					